


SUH141T



SUH141T is a 4K/UHD HDMI to HDBaseT splitter with 1 HDMI input, 1 HDMI loop output and 4 extended distance HDBaseT outputs. Each output transmits video and control signals up to 70m@1080P and 40m@4K. It features 4K@60Hz 4:2:0, HDCP 2.2 compliance, EDID management and PoH for powering remote receiver.

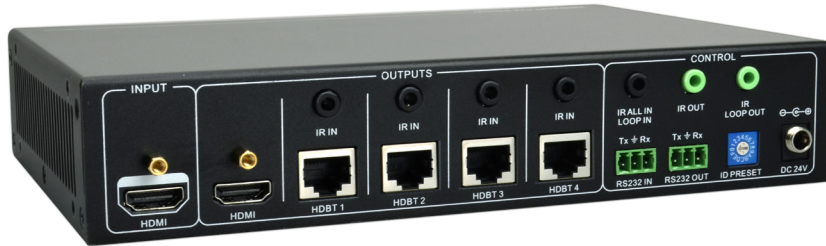

- Distribute 1 UHD/4K HDMI signal to 4 HDBaseT outputs, with 1 loop HDMI output.
- Transmission distance up to 230ft/70m under 1080P, 131ft/40m under 4K.
- Support resolution up to 4K@60Hz 4:2:0.
- HDCP 2.2 compliant.
- Supports RS232 , IR pass through, IR cascaded control.
- Supports PoH and EDID management.

Input	1 HDMI (HDMI 1.4), 1 IR (3.5mm jack)
Output	4 HDBT (RJ45) , 1 Audio(3.5mm mini jack)
HDMI Standard	HDMI 1.4, support HDMI Deep Color, full 3D & 4Kx2K@30Hz
Video Signal	Support VESA and SMPTE Video 480P, 1024x768, 720P, 1280x800, 1080P, 3840x2160@30Hz
HDCP	HDCP 2.2 compliant
EDID	In-built EDID management
Control	RS232, IR Control
Raw materials	Aluminum shell
Bandwidth	10.2Gbps
Power Supply	Input: 100V ~ 240V AC Output: DC 24V 2.71A
Temperature	-10 ~ 40°C
Relative Humidity	10% ~ 90%
Chassis Dimension	W240 x H44 x D148mm
Weight	About 725g

